

24/Seven™ Solid No. 570

NOTES

24/Seven Solid is for those who want to use a moulded rubber mat rather than a SpongeCote® in dry areas, 24/Seven Solid is of unparalleled value. A substantial, solid surface anti-fatigue mat, it's exceptionally resilient and designed for comfort. Available in a single 900mm x 900mm workstation size, 24/Seven Solid is modular with a hidden interlocking system, perfect for covering large areas without extra connectors. It's available in a Nitrile formulation for areas exposed to chemical spills or caustic cleaning agents. Use the 75mm wide moulded safety borders for easy trolley access.

Customised Mats

If you have special contours or a large size, let us make it for you. Customised sizes of 24/Seven Solid mats are permanently locked together, available in 300mm increments and are only limited by weight and shipping requirements.

Specifications

Uses: All dry work areas

Compounds: All-Purpose GR - 100% Natural rubber
Grease Proof GP - 50% Nitrile

Durometer: 55 per ASTM D2240

Coefficient of Friction: .85 Dry .33 Wet per ASTM F1677

Tabor Abrasion: 1% per Fed. Std. 193

Flammability: "A" Rating per MVSS 302

Edging: Optional 75mm wide safety bevelled

Thickness: 15mm

Warranty: 3 years, conditional

Colour: Mat - Black, Edging - Black or Yellow

Stock Sizes

900mm x 900mm

75mm x 990mm - bevelled edge



75mm x 990mm Female Ramp snaps onto the protruding mat knobs.



75mm x 990mm Male Ramp snaps into the underside of the mat.



Tested by CSIRO. The test results are available upon request. Wet Pendulum Test/Dry Floor Friction Test - AS/NZS4586:1999

24/Seven™ Solid GritWorks!® No. 574

24/Seven™ GritWorks!® is specifically for use in wet areas where extra traction is needed. The surface provides almost 40% more traction in wet areas. The Nitrile formulation provides better chemical resistance than natural or SBR rubber products.

Specifications

Uses: Wet, dry and greasy areas

Compounds: Grease Proof GP - 50% Nitrile rubber

Durometer: 60 per ASTM D2240

Coefficient of Friction: 1.10 Dry 1.10 Wet per ASTM F1677

Tabor Abrasion: <1 % lost @ 1,000 cycles per Fed Std. 193

Flammability: "A" Rating per MVSS 302

Edging: Optional 75mm wide safety bevelled

Thickness: 16mm

Warranty: 3 year, conditional


Colour: Mat - Black

Edging - Black or Yellow

Stock Sizes

900mm x 900mm

75mm x 990mm - bevelled edge

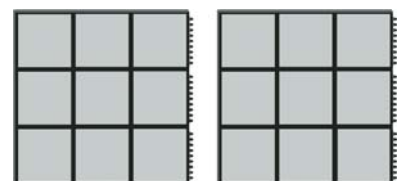

NOTES