




24/Seven™ Holes No. 572

24/Seven Holes is named for its ability to work twenty-four hours a day, seven days a week to keep your employees comfortable and is exceptional value. This 15mm thick, single workstation mat has a hidden interlocking system designed to connect on all four sides making it perfect for covering large areas. For easy trolley access and extra employee safety, attach the 75mm wide safety bevelled edge. Available in two exceptionally resilient and durable rubber compounds, 24/Seven Holes offers flexibility and comfort at an outrageously economical price.


Customised Mats

If you have special contours or a large size, let us make it for you. Customised sizes of 24/Seven mats are available in 300mm increments and are only limited by weight and shipping requirements.

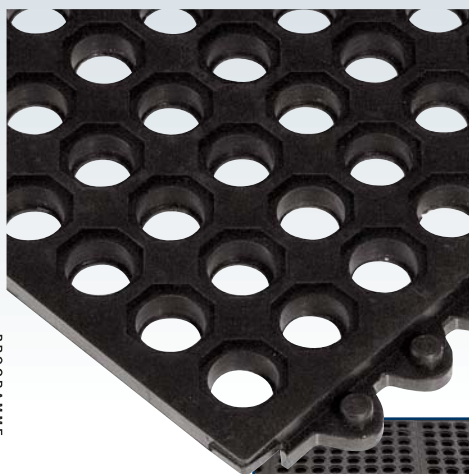

Specifications

- Uses:** Wet, dry and greasy areas
- Compounds:** All-Purpose GR - 100% Natural rubber
Grease Proof GP - 50% Nitrile
- Durometer:** 60 per ASTM D2240
- Coefficient of Friction:** 78 Dry .68 Wet per ASTM F1677
- Tabor Abrasion:** 1% per Fed. Std. 193
- Flammability:** "A" Rating per MVSS 302
- Edging:** Optional 75mm wide safety bevelled
- Thickness:** 15mm
- Warranty:** 3 year, conditional
- Colour:** Mat - Black, Edging - Black or Yellow

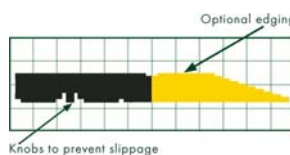

75mm x 990mm Female Ramp snaps onto the protruding mat knobs.




75mm x 990mm Male Ramp snaps into the underside of the mat.



Stock Sizes

- 900mm x 900mm
- 75mm x 990mm - bevelled edge


 Custom widths and unique configurations are available. Some mats may require several sections. Please call for a quotation.

24/Seven™ GritWorks!® No. 576

24/Seven™ GritWorks!® is specifically for use in wet areas where extra traction is needed. The surface provides almost 40% more traction in wet areas. And its Nitrile formulation provides better chemical resistance than natural or SBR rubber products.

Specifications

- Uses:** Wet, dry and greasy areas
- Compounds:** Grease Proof GP - 50% Nitrile rubber
- Durometer:** 60 per ASTM D2240
- Coefficient of Friction:** 1.10 Dry 1.10 Wet per ASTM F1677
- Tabor Abrasion:** <1 % lost @ 1,000 cycles per Fed Std. 193
- Flammability:** "A" Rating per MVSS 302
- Edging:** Optional 75mm wide safety bevelled
- Thickness:** 16mm
- Warranty:** 3 year, conditional
- Colour:** Mat - Black
Edging - Black or Yellow

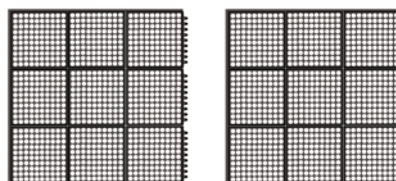

Stock Sizes

- 900mm x 900mm
- 75mm x 990mm - bevelled edge

NOTES

NOTES