

Electrically Conductive Anti-Fatigue No. 786

NOTES

The **Electrically Conductive Anti-Fatigue** mat quickly drains static electricity from workers before it can be passed on to sensitive equipment such as computers, cash registers or any product with a computer chip. Designed to dramatically reduce standing worker fatigue, Electrically Conductive Anti-Fatigue has a Nitricell® "Supreme Comfort" sponge base. For maximum effectiveness, ground the mat and keep the surface clean.

Specifications

Uses: Areas at risk for damage from static electricity

Compound: Vinyl

Resistivity: RTT - 1×10^6 ohms
RTG - 1×10^6 ohms

Thickness: 12mm

Coefficient of Friction: .68 Dry per ASTM F1677

Compression: .415 inches @ 35 psi per ASTM D575

Tabor Abrasion: < 1% lost @ 1,000 cycles per Fed Std. 193 Modified

Flammability: Pass MVSS 302

Warranty: 3 year, conditional

Colour: Black



Stock Sizes


900mm x 1500mm

900mm x 22.8M roll

Per metre cut to length and bevelled x 900mm wide

Snap lock ground cord available

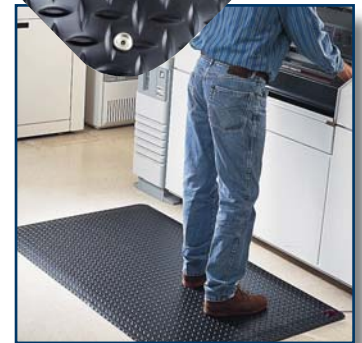

 Custom widths and unique configurations are available. Please call for a quotation.

Diamond-Plate Switchboard No. 701

Diamond-Plate Switchboard is the newest version of high-performance non-conductive matting. Designed to protect personnel in areas with dangerous high-voltage equipment, it can insulate against as much as 30,000 volts of electricity. Its unique diamond-embossed surface is easily cleaned and will not collect contaminants. Diamond-Plate Switchboard matting conforms to ANSI/ASTM D-178-01 Type 2, Class II.

Specifications

Uses: Around electronic and high-voltage apparatus

Compound: PVC

Dielectric Strength: 30,000 volts

Recommended Usage: Up to 17,000 volts per ASTM D-178-01

Coefficient of Friction: 68. Dry per ASTM F1677

Tabor Abrasion: 1% lost @ 1,000 cycles per Fed Std. 193 Modified

Flammability: "A" Rating per MVSS 302

Thickness: 5mm


Warranty: 1 year, conditional


Colour: Black

Stock Sizes

900mm x 22.8M roll

Per metre cut to length x 900mm wide



 Custom widths and unique configurations are available. Some mats may require several sections. Please call for a quotation.

NOTES