

# KleenSweep SpongeCote® No. 433

## NOTES

**KleenSweep SpongeCote** is known for its round-rib surface pattern, easy to maintain in heavy use areas. This flexible vinyl surface adds to the overall comfort of the mat while also providing good resistance to many common industrial chemicals and solvents. KleenSweep SpongeCote, with its Nitricell® sponge base, is a great tool for reducing fatigue in heavy-use environments.

### Specifications

**Uses:** All dry work areas

**Compound:** Vinyl surface with a Nitricell® sponge base

**Compression:** 8mm @ 35 psi per ASTM D575

**Coefficient of Friction:** .84 Dry per ASTM F1677

**Tabor Abrasion:** < 1% lost @ 1,000 cycles per Fed Std. 193

**Flammability:** "A" Rating per MVSS 302


**Edges:** Safety bevelled

**Thickness:** 12mm

**Warranty:** 3 years, conditional

**Colour:** Black with bevelled edges

Vinyl surface



Nitricell® sponge base



### Stock Sizes

600mm x 900mm

900mm x 1500mm

600mm x 22.8M roll

900mm x 22.8M roll

1200mm x 22.8M roll

Per metre cut to length and bevelled x 600mm wide

Per metre cut to length and bevelled x 900mm wide

Per metre cut to length and bevelled x 1200mm wide

Tested by CSIRO. The test results are available upon request. Wet Pendulum Test/Dry Floor Friction Test - AS/NZS4586:1999

# Hog Heaven™ No. 260

**Hog Heaven** has a solid Nitrile Rubber surface for better chemical resistance. Textured Nitrile Rubber surface for superior slip resistance. Closed cell Nitrile/PVC cushion backing provides long-lasting comfort without breaking down. 100% Nitrile Rubber border remains flexible for the life of the product and will not crack or curl.

### Specifications

**Uses:** All dry work areas

**Compound:** 100% solid Nitrile Rubber

**Coefficient of Friction:** Dry .92 and Wet .86

**Thickness:** 16mm

**Edges:** Bevelled edges on all four sides

**Warranty:** 3 years



**Colour:** Black or Black with Yellow Chevron Safety Border

### Stock Sizes:

600mm x 840mm

840mm x 1200mm

840mm x 1470mm

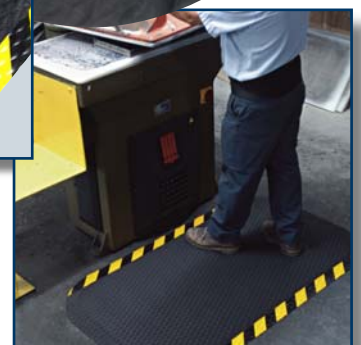

Tested by CSIRO. The test results are available upon request. Wet Pendulum Test/Dry Floor Friction Test - AS/NZS4586:1999

## NOTES